



- 28 cm in width.
- 2 Coffee grinders.
- 175 espresso/hour.
- Coffee/tea production.



TECHNICAL DATA **e2ct**

Productivity

Coffee 175+ espresso/hour (23s extraction time)
Hot Water or 120 hot water units/hour (2.0dl hot water portions)

Technical data


Brew chamber 1 x up to 24 g. Reverse gravity extraction system
Grinding system 2 x super drive Ø64 mm ceramic grinder burrs
User Interface 1 x 8" Colour Touch screens to create bespoke products
Beans hopper 2 x 1.5kg
Coffee spout height 65...165mm
Interface USB, SD-Card, Ethernet, Serial, RS-232 CCI (24VDC, 15W)
Standby mode less than 2W

Design

Dimensions 282 x 600 x 713mm (WxDxH)
Weight ≈ 60 kg
Lighting (Front) Full colour LED, all colours and colour gradient adjustable

Connection

Power requirement Single-phase 1 x 220 - 240V, 1L-N-PE, 16A, 50/60Hz
Two-phases 2 x 110 - 120V, 2L-N-PE, 16A, 50/60Hz
Water Stainless steel braided hose l=2m with screwcap G3/8", 0 - 4 bar, self priming up to 1m
Drain Drain hose ø23mm, l=2m
Water quality Total hardness: 5 - 8°dH / Carbonate hardness: max. 6°KH / pH value: ideal 7.0 - 7.2

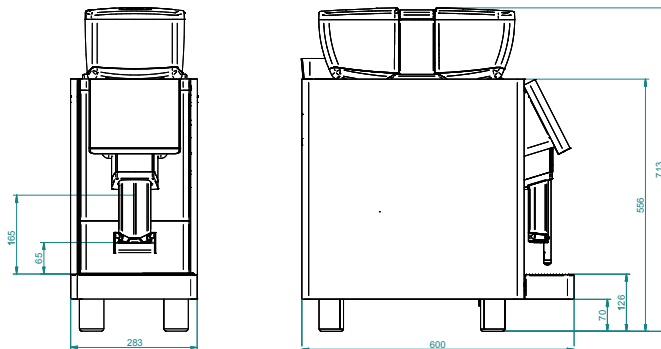

Options

e2ct + Cup heater

